



Pneumatic Bead and Spray Applicator for cartridges, sachets and pouches.

The Cox Jetflow 3 is a multipurpose applicator for use with all conventional and sprayable sealants and adhesives currently available.

The Cox Jetflow 3 is the most flexible and easy-to-use spray and bead applicator, efficiently delivering low to high viscosity sealants, in spray or bead form, for a wide range of applications.

## Jetflow 3™



- Versatile tool – cartridge, sachet and pouch compatibility
- Ergonomically designed for comfort
- Lightweight for prolonged use
- Easy change between bead and spray with one easy twist
- Precise control with the unique built-in regulator to set material output speed
- Quiet operation – ideal for indoor use (less than 70dB)
- Designed and made in the UK for assured quality

**NEW COMBI  
VERSION**


# Jetflow 3™

The Jetflow 3 has been designed to match global customer demands for an easy-to-use and lightweight, high quality spray and bead applicator.

Jetflow 3 is the first Cox applicator to be designed with a control at the head of the applicator that changes the output from spray to bead in one easy twist.

## Sachet, Pouch or Cartridge – your choice

Jetflow 3 is truly flexible. With the optional conversion kit, you can easily change the configuration of the 310ml applicator from cartridge to sachet or sachet to cartridge. Now you don't need two specialist applicators – Jetflow 3 will do it all, spray, lay beads, and accept cartridges, sachets or pouches.

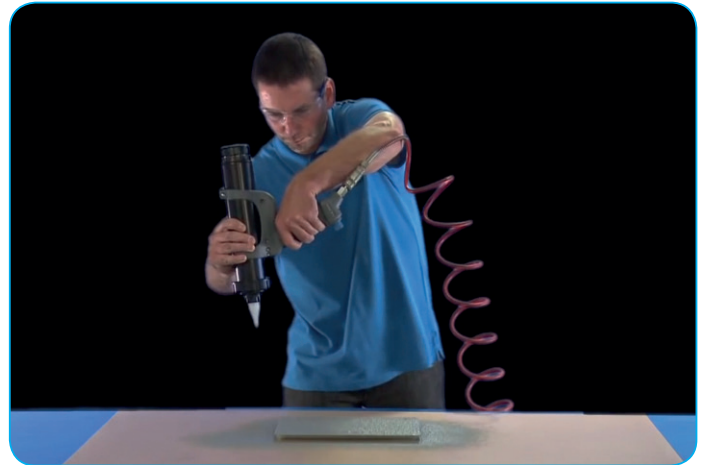


Change between bead and spray with one easy twist



## Spray Patterns

With Jetflow 3's range of nozzles, unique flow control cap and the two flow controls, the operator can easily regulate the incoming airflow and pattern of spray the applicator delivers. There is no other applicator in the market that provides this level of flexibility and controlled delivery.

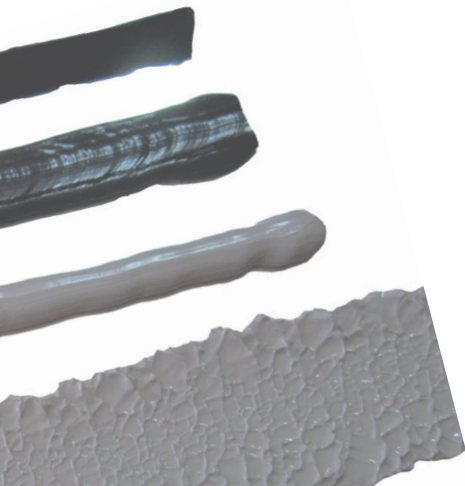

Built in regulator for precise control

## Even and controlled beads

Because of Jetflow 3's ability to deliver higher viscous materials, it makes the applicator ideal for applying the bonding sealant typically used by vehicle windscreen fitters. As with the spray facility of the applicator, Jetflow 3 can deliver a wide range of bead thicknesses and material viscosities.



### Regulators

**Standard:** 6.8 bar (100 psi) ●  
**Options available:** 3.4 bar (50 psi) ●  
5.2 bar (75 psi) ●  
8.5 bar (125 psi) ○

Colour of plug denotes regulator value



## RANGE FEATURES

- Versatile tool for bead and spray patterns to be used with cartridges, sachets and pouches
- Ergonomically designed for comfort
- Lightweight for prolonged use
- Built-in regulator for setting the speed of material flow
- Built-in silencer for indoor use (less than 70dB)
- Easy change between spray and bead – with just one twist

### Nozzle range



OUTER NOZZLE  
5 Supplied  
PART No: 2M2588



INNER SACHET NOZZLE  
5 Supplied  
PART No: 2M2620



INNER ALUMINIUM CARTRIDGE NOZZLE  
5 Supplied  
PART No: 2M2604



INNER PLASTIC CARTRIDGE NOZZLE  
5 Supplied  
PART No: 2M2653

## Jetflow 3 Cartridge



### Jetflow 3™ CARTRIDGE

#### Pneumatic applicator for cartridges

- Low – medium viscosity materials in cartridges
- Compact tool – ideal for tight spaces
- Very light and well-balanced tool to reduce operator fatigue



310ml 1.45kN 1220g

## Jetflow 3 Sachet



### Jetflow 3™ SACHET

#### Pneumatic applicator for sachets

- Low – medium viscosity materials in sachets up to 600ml
- For larger volume materials
- Light and well-balanced tool to reduce operator fatigue



310ml 1.45kN 1240g  
400ml / 1.45kN 1470g  
600ml

## Jetflow 3 Compact Combi



NEW COMBI  
VERSION – FOR  
CARTRIDGES  
AND SACHETS

### Jetflow 3™ COMPACT COMBI

#### Pneumatic applicator for cartridges and sachets

- Low – medium viscosity
- The versatile tool for cartridges AND sachets
- For larger volume materials
- Compatible with a wide range of material systems



310ml 310ml 1.45kN 1760g  
400ml  
600ml

# Jetflow 3™

## Compressor Guide



Output of around 150L/min (5cfm) with receiver tank from 10L (PC Cox recommends 50L for long tool life)



Airline/Hose



Connector Options:  
EU Connector  
US Connector  
UK Connector



Air tool with exhaust valve (rapid depressurisation when trigger is released)

## Jetflow 3 – Fully standards compliant:

• ISO 12100:2010 • ISO 9001:2008 • EN 983:1996+A1:2008 • CE

### COX Innovation...

Easily convert between 310ml Sachet and Cartridge models

Conversion Kit available PART No: 7A3601



### Bespoke power and viscosity options

For different power or viscosity requirements, please contact us or visit [www.pccox.co.uk](http://www.pccox.co.uk)

### COX Accessories

A wide range of nozzles are available for you to get the most from your applicator

## PRODUCT RANGE BY POWER



## World leading consumer support

Cox have invested in a library of online tutorial videos to ensure your customers know how to use our products to their best, reducing usage related queries and minimising your need for customer support.

[www.pccox.co.uk/academy](http://www.pccox.co.uk/academy)



PC Cox Ltd., Turnpike Road, Newbury, Berkshire, RG14 2LR  
T Sales +44 (0) 1635 264500 F +44 (0) 1635 264555  
E [sales@pccox.co.uk](mailto:sales@pccox.co.uk) [www.pccox.co.uk](http://www.pccox.co.uk)

©PC Cox 2014. Cox and Jetflow are trademarks of PC Cox Ltd.  
Every effort has been made to ensure that the information contained in this leaflet was correct at the time of going to press. However, the company retains the right to change any specification without notice, in line with the company's policy of continual product development.

1P3215-jetflow-v11

**COX**  
The original

